

Quattro

UA0653 HL

Assembly

Prepare the parts. Keep the main fixture covered to prevent scratches. The top part of the fixture has to be exposed for assembly. Requires two to three people for installation. For dimmer switch, we recommend OSRAM Ref 45561.

Parts

- A. Canopy
- B. Ceiling plate
- C. Chain
- D. Base loop
- E. Alabaster luminaire
- F. LED driver
- G. End loops

1. Take the dimensions between base loops 1, 2, and 3, and project them to the ceiling. (Fig.1)
2. Take the canopy (A) and unscrew the sides to access the ceiling plate (B). Use the ceiling plates as a guide to locating the anchors on the ceiling. (Fig.2)
3. Install the anchors into the ceiling. Pull the wires from the junction box thru the hole in the ceiling plate. Slide the ceiling plate on the anchors and secure them. Install the other three ceiling plates. (Fig.3)

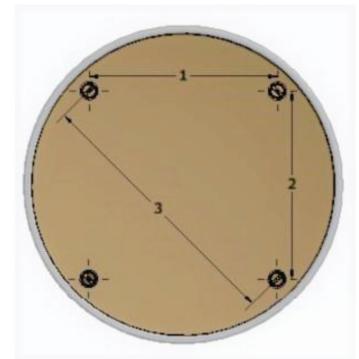
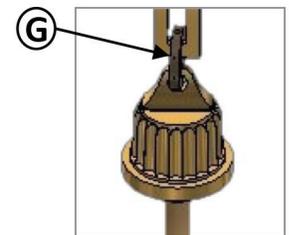
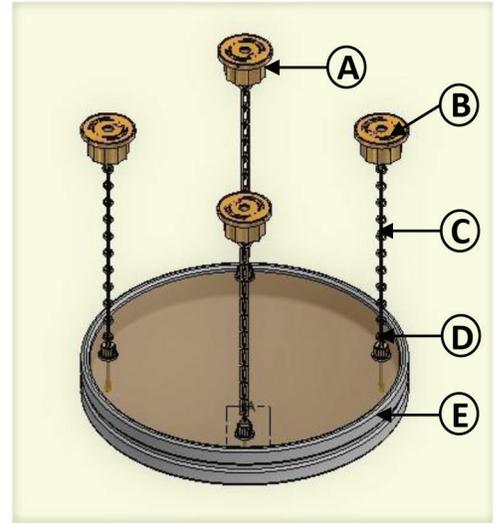


Fig.1

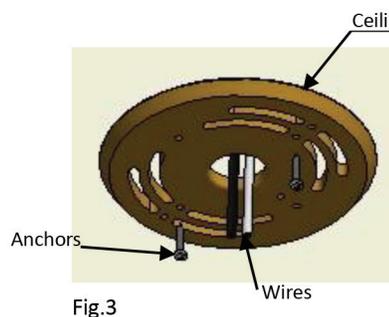


Fig.3

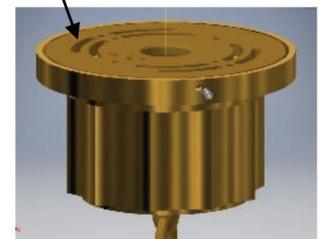


Fig.2

4. Unscrew the end loop (G) of each set of chains. (Fig.4)
5. Screw each canopy (A) and set of chains to the ceiling plates.
6. Attach each end loop(G) to the each base loops (D) on the alabaster luminaire (E). (Fig.5).
7. After the light fixture is hanging. Rest the LED driver onto the LED pad. On the LED diver, locate the wires labeled "to LED pad." Connect the LED driver to the LED pad wires: red to red, and black to black. (Fig.6)
8. Thread the wires labeled "Input to the junction box" and "To switch" from the LED driver through a chain and attach them to the wires coming down from the junction box through the canopy.

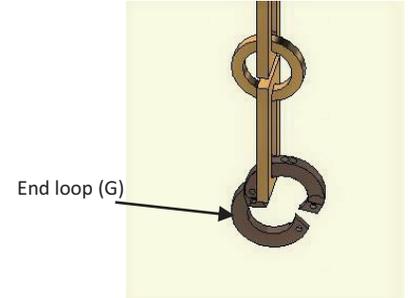


Fig.4

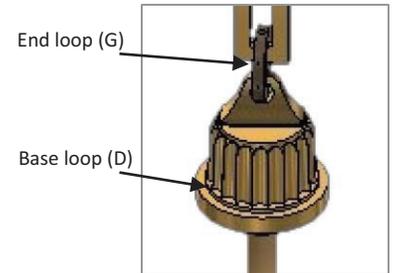


Fig.5



Fig.6