

Suspension Chandelier

UA0652 HL

Warning:

Risk of fire and electrical shock if improperly installed—must be installed by a licensed electrician according to the instructions provided.

Caution:


Turn off power at main electrical box before installation.

Assembly

Prepare the parts. Keep the main fixture covered to prevent scratches. The top part of the fixture has to be exposed for assembly. Requires two to three people for installation. For dimmer switch, we recommend OSRAM Ref 45561.

Parts

- A. Canopy
- B. Ceiling Plate
- C. Chain
- D. Chain loop
- E. Alabaster Luminaire
- F. LEDpad
- G. End Loops

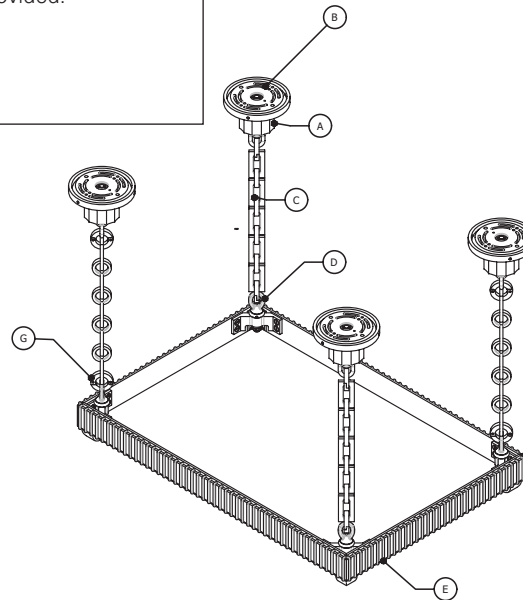

1. Take the dimensions between (D) chain loops 1, 2 and 3 project them to the ceiling. (Fig.1).
2. Take the canopy (A) and unscrew the sides to access the ceiling plate (B). Use the ceiling plates as a guide to locating the anchors on the ceiling. (Fig.2).
3. Install the anchors into the ceiling. Pull the wires from the junction box thru the hole in the ceiling plate. Slide the ceiling plate on the anchors and secure them. Install the other three ceiling plates. (Fig.3)

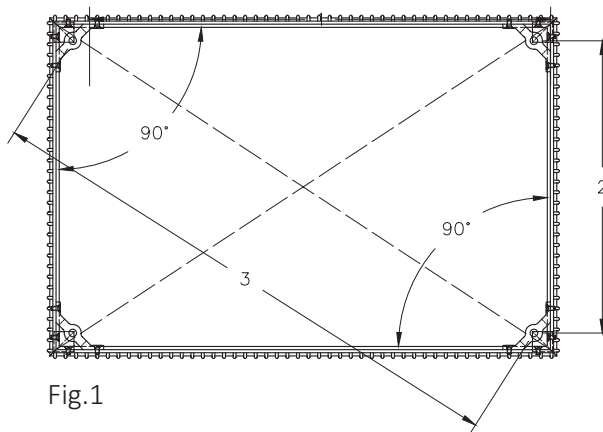


Fig.1

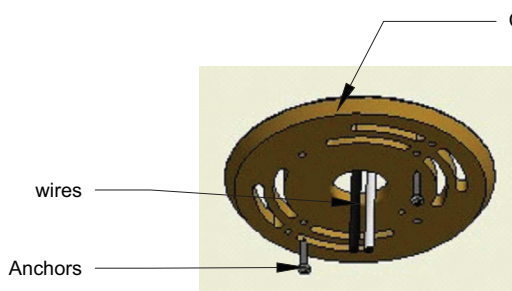


Fig.3




Fig.2

4. Unscrew the end loop (G) of each set of chains.(Fig.4)

5. Screw each canopy (A) and set of chains to the ceiling plates.

6. Attach each end loop(G) to the each chain loops (D) on the Alabaster luminaire (E). (Fig.5)

7.After the light fixture is hanging. Rest the LED driver onto the LED Pad. On the LED driver, locate the wires labeled "to LED pad". Connect the LED driver to the LED Pad wires, red to red and black to black. (Fig.6)

8. Thread the wires labeled "Input to the junction box" and "To switch" from the LED driver thru a chain and attach them to the wires coming down from the junction box thru the canopy.

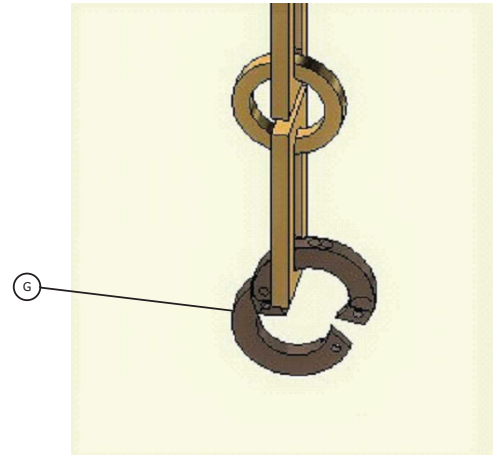


Fig.4

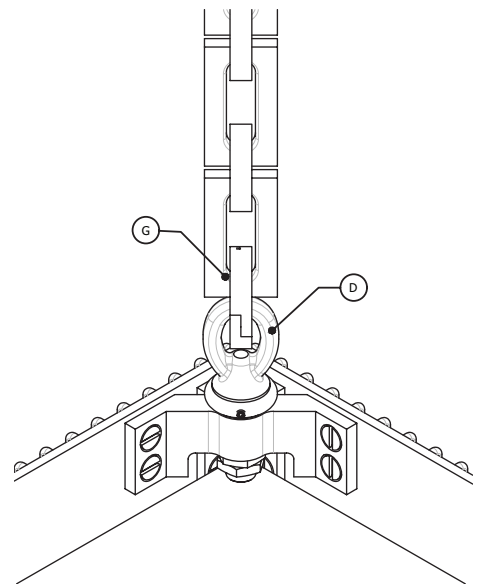


Fig.5



Fig.6