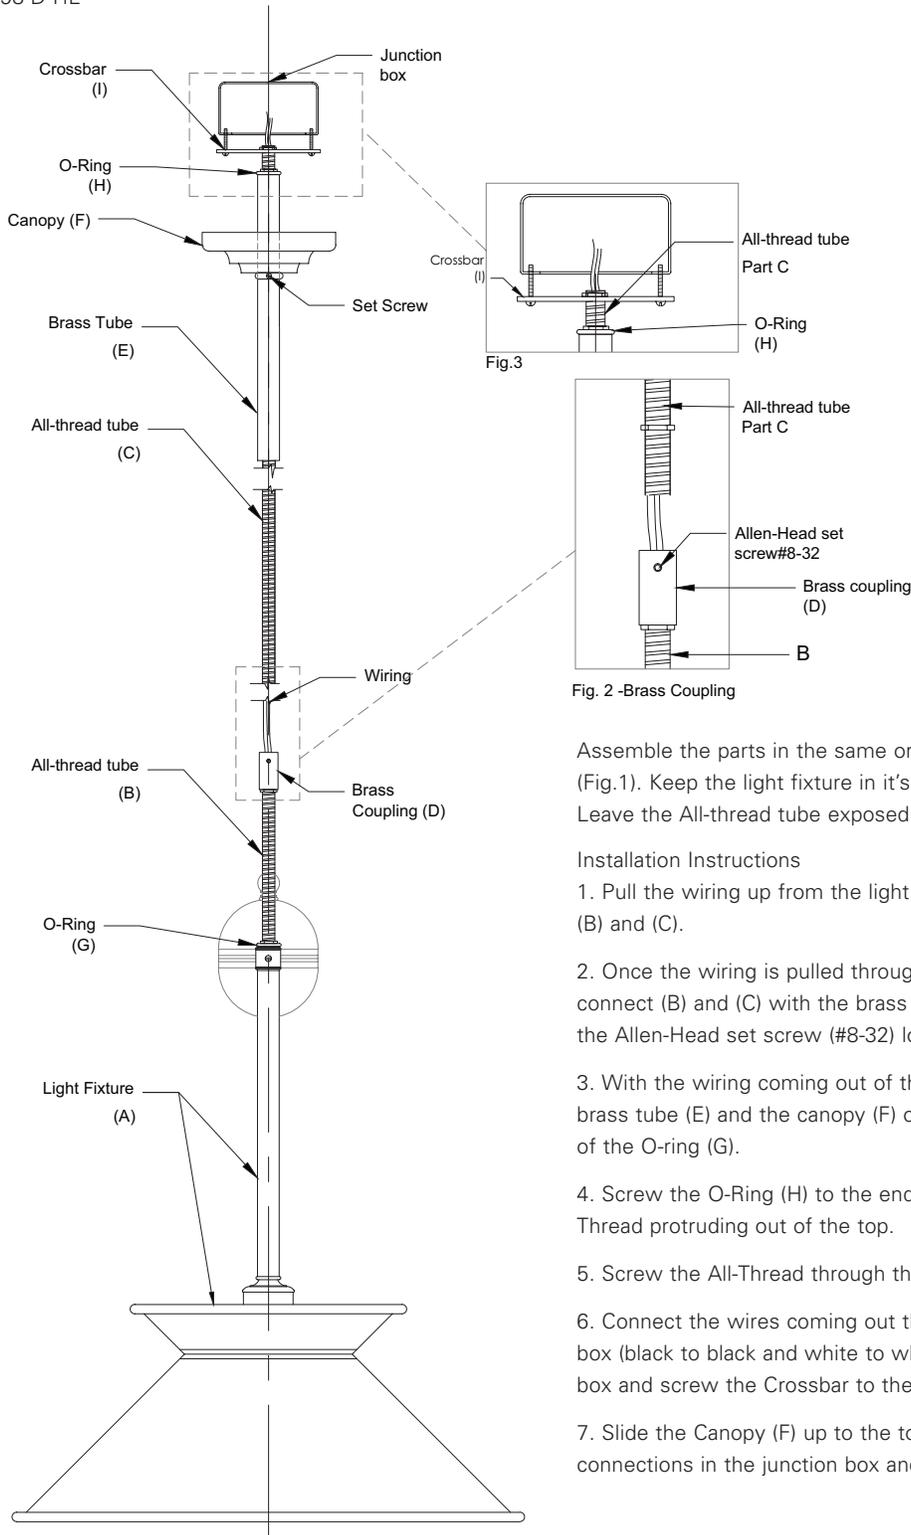


**Billiard [Double Pendant]**

UA0598-D HL


**Warning:**

Risk of fire and electrical shock if improperly installed—must be installed by a licensed electrician according to the instructions provided.

**Caution:**

Turn off power at main electrical box before installation.

Fig. 2 -Brass Coupling

Assemble the parts in the same order as they appear in the drawing (Fig.1). Keep the light fixture in it's wrapping to prevent any scratches. Leave the All-thread tube exposed for assembly.

**Installation Instructions**

1. Pull the wiring up from the light fixture (A) through the All-thread tubes (B) and (C).
2. Once the wiring is pulled through the All-thread tube (C) you can connect (B) and (C) with the brass coupling (D). Fig.2 and secure it with the Allen-Head set screw (#8-32) located in the brass coupling.
3. With the wiring coming out of the top of the All-Thread (C), slide the brass tube (E) and the canopy (F) over the All-thread and let it rest on top of the O-ring (G).
4. Screw the O-Ring (H) to the end of the brass tube (E) with the All-Thread protruding out of the top.
5. Screw the All-Thread through the Crossbar (I) (Fig.3).
6. Connect the wires coming out the All-Thread to the wires in the junction box (black to black and white to white). Push the wires into the junction box and screw the Crossbar to the junction box.
7. Slide the Canopy (F) up to the top of the brass tube (E) covering the connections in the junction box and secure the Canopy with the set screw.

Fig. 1