

Mouille Style Bent Arm

UA0634 HL

Assembly

Prepare the parts. Keep the arms covered to prevent scratches, just expose the ends. Requires two people for installation.



Tubular Top




(3) Arms

Warning:

Risk of fire and electrical shock if improperly installed—must be installed by a licensed electrician according to the instructions provided.

Caution:

Turn off power at main electrical box before installation.

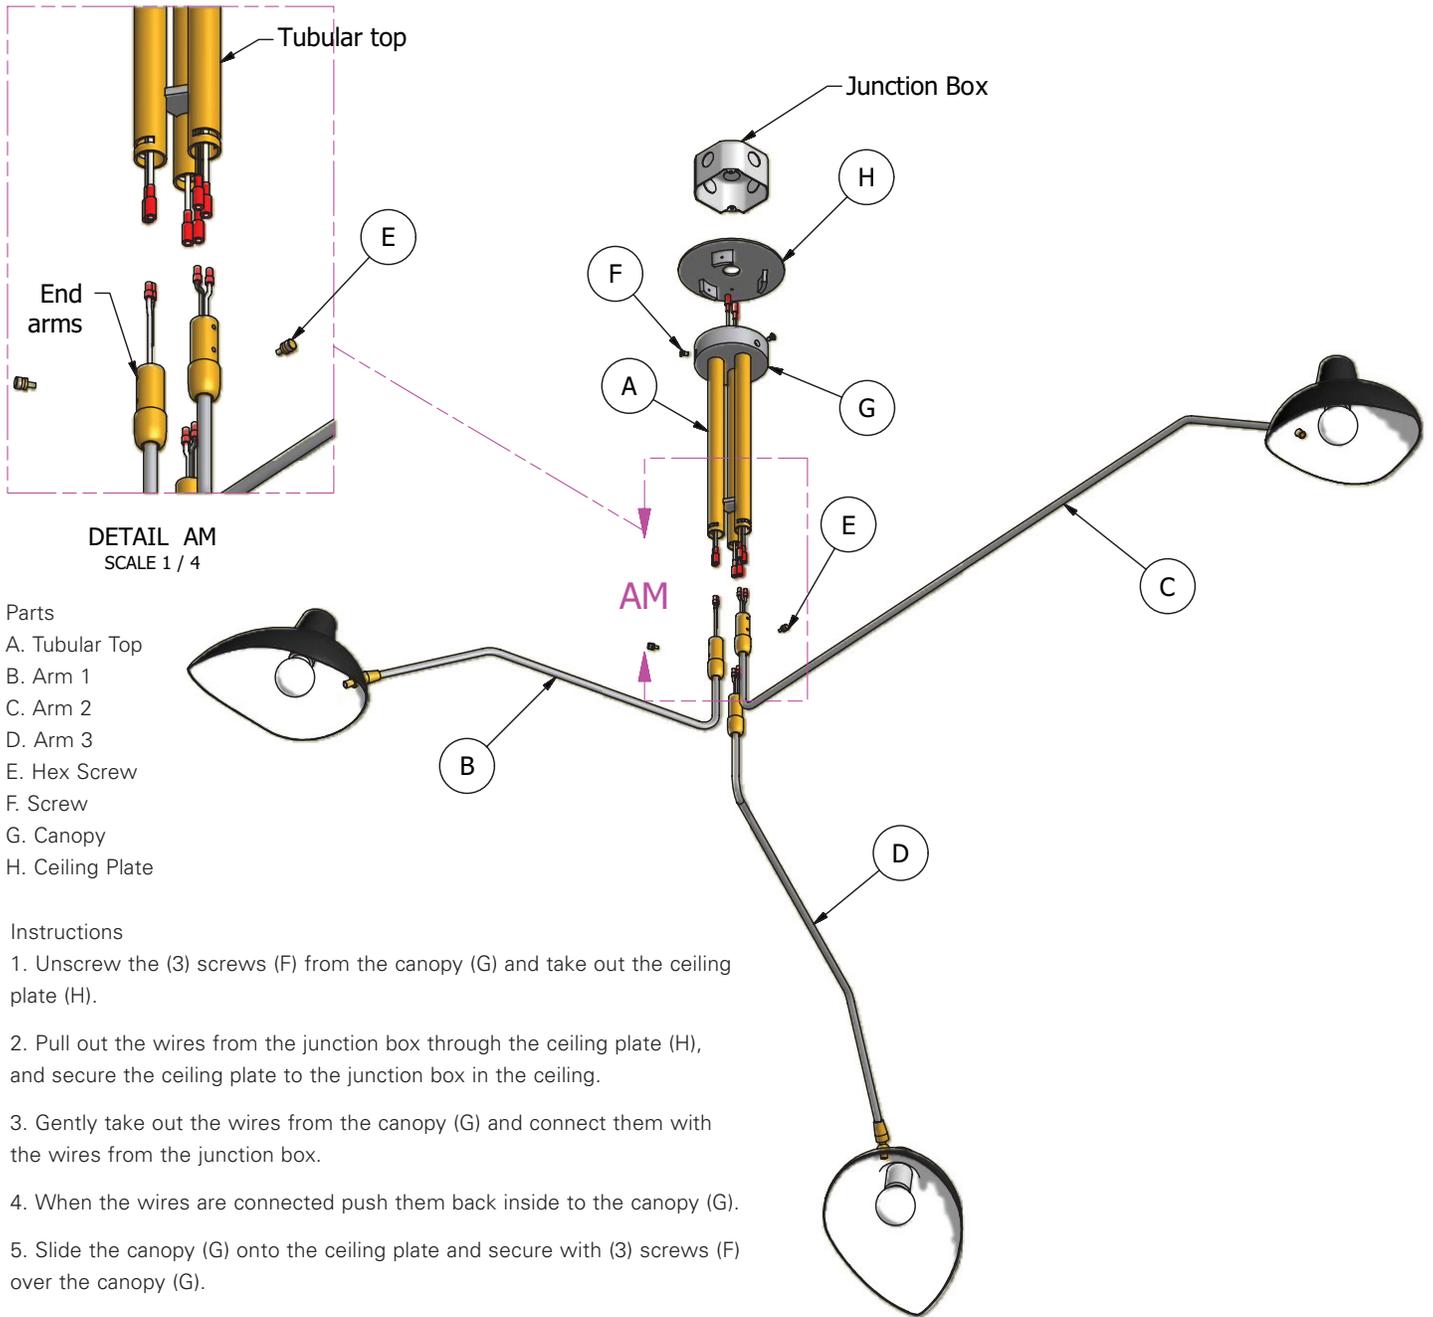

DETAIL AM
SCALE 1 / 4

- Parts
- A. Tubular Top
 - B. Arm 1
 - C. Arm 2
 - D. Arm 3
 - E. Hex Screw
 - F. Screw
 - G. Canopy
 - H. Ceiling Plate

- Instructions
1. Unscrew the (3) screws (F) from the canopy (G) and take out the ceiling plate (H).
 2. Pull out the wires from the junction box through the ceiling plate (H), and secure the ceiling plate to the junction box in the ceiling.
 3. Gently take out the wires from the canopy (G) and connect them with the wires from the junction box.
 4. When the wires are connected push them back inside to the canopy (G).
 5. Slide the canopy (G) onto the ceiling plate and secure with (3) screws (F) over the canopy (G).
 6. Unscrew the Hex screw (E) from the end of the arm-1 (B) and pull out the wires black and white.
 7. Take out the wires from the bottom of tubular top (A) and connect them with the wires from the arm-1 (B). Black with black and white with white.
 8. Push the connected wires inside of the tubular top and slide the end arm-1 (B) inside of the tubular top (A) and secure it with the Hex Screw (E).
 9. Repeat the same sequence with the arm-2 (C) and arm-3 (D).